



www.cela.it



TLS 16

TECHNICAL FEATURES

TECHNISCHE DATEN

TLS 16

MAX WORKING HEIGHT* <i>Max Arbeitshöhe</i>	m	16,00
PLATFORM FLOOR HEIGHT* <i>Korbodenhöhe</i>	m	14,00
MAX WORKING OUTREACH* <i>Max Arbeitsreichweite</i>	m	9,00
TURRET ROTATION <i>Turmdrehung</i>		CONTINUA <i>Continuous</i>
BASKET LOAD <i>Korbgewicht</i>	kg	225
BASKET SIZE <i>Größe des Korbs</i>	mm	1400 x 700 x 1100 h
BASKET TYPE <i>Korbtyp</i>		ALLUMINIO <i>Aluminium</i>
CONTROLS <i>Steuerungen</i>		IDRAULICI <i>Hydrauliques</i>
OUTRIGGERS <i>Stabilisatoren</i>		TIPO H + H <i>Type H + H</i>
MINIMUM G.V.W. <i>Minimum G.V.W.</i>	t	3,5

* Depending on the installation

* Abhängig vom Trägerfahrzeug

Technical data can be revised without prior notice/Tolerances on mentioned data + -5%

Technische Änderungen vorbehalten/Datentoleranz + -5%





**STANDARD
EQUIPMENT**

- Anti-collision device between booms and truck cabin
- Basket rotation 65° + 65°
- Buzzer from the basket
- Easy-lift stabilization
- Electric hour-counter
- Emergency hand-pump
- Flanged holding valves
- Hydraulic system with differential filtering system in both flow directions
- Magnetic revolving light on truck cabin
- 230 V electric plug in the basket
- Pipes and cables inside the booms
- Self-greasing bushes
- Start-Stop of the engine from the basket
- Tool box
- Visual control device for chassis stabilization



**STANDARD
AUSSTATTUNG**

- Anfahrtschutz für Kabine/Arbeitskorb
- 65° + 65° Drehbarer Arbeitskorb
- Warnhupe vom Arbeitskorb
- "Easy lift" Abstützung
- Elektrischer Stundenzähler
- Hand-Notpumpe
- Sicherheits- Halteventile
- Hochleistungsfilter in der Hydraulik Anlage für Vor- und Rücklaufilter
- Magnetische Blinkleuchte auf der Fahrzeugskabine
- 230 V Steckdose im Arbeitskorb
- In Armen liegenden Leitungen und Kabel
- Gelenke mit selbstschmierenden Buchsenorb
- Motor Start-Stopp vom Arbeitskorb
- Kastenaufbau
- Visuelle Prüfung der Abstützung

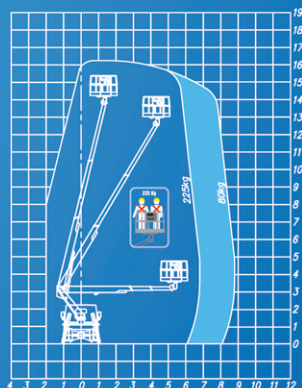

www.cela.it



Via dei Ponticelli Trav. 1 ^ n. 2/4

25040 Corte Franca (BS) Italy

Tel.: +39 030 9884084 - Fax +39 030 984515

E-Mail: info@cela-it.com - Web: www.cela.it